
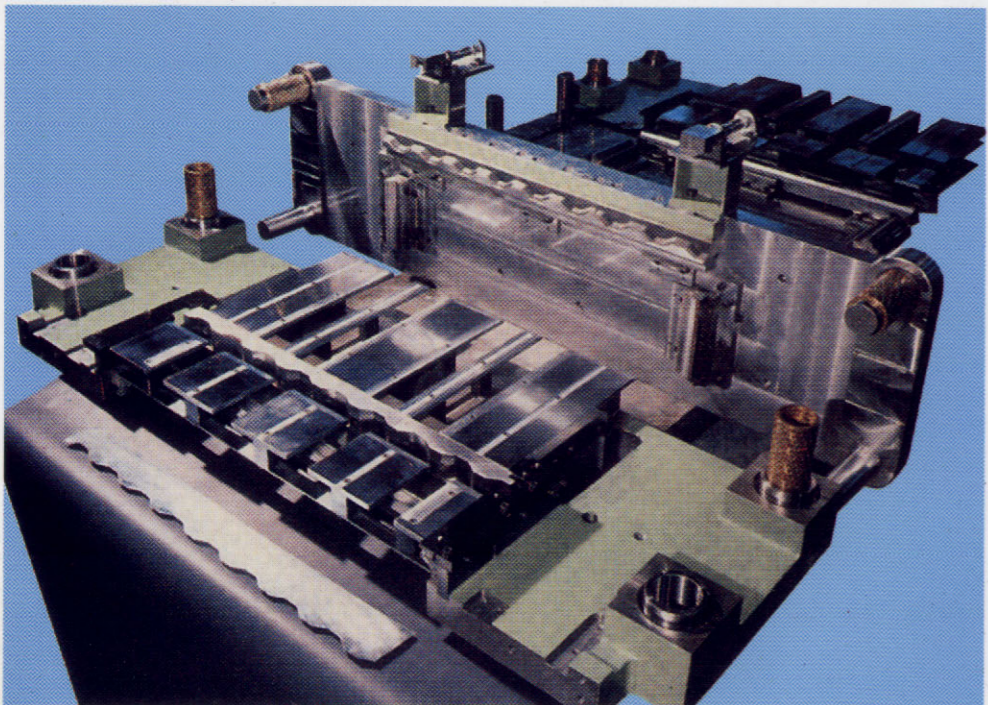


SCROLL SHEAR A183

Maximum sheet exploitation, minimum geometrical scraps. Bridge frame guiding the guillotine. Horizontal table for the automatic sheet feeding system including two alternate motion feeding bars. Side trimming to the required width. The main shaft carries the two eccentrics of the guillotine and the flywheel. Auxiliary pusher actuated by an air cylinder is controlled by solenoid valve, energized by a micro-switch adjustable on the forwarding sheet position. Modular side trimmer unit, separately and individually adjustable. Air brake clutch group and centralized lubrication system. Centralized electrical control and checking devices.

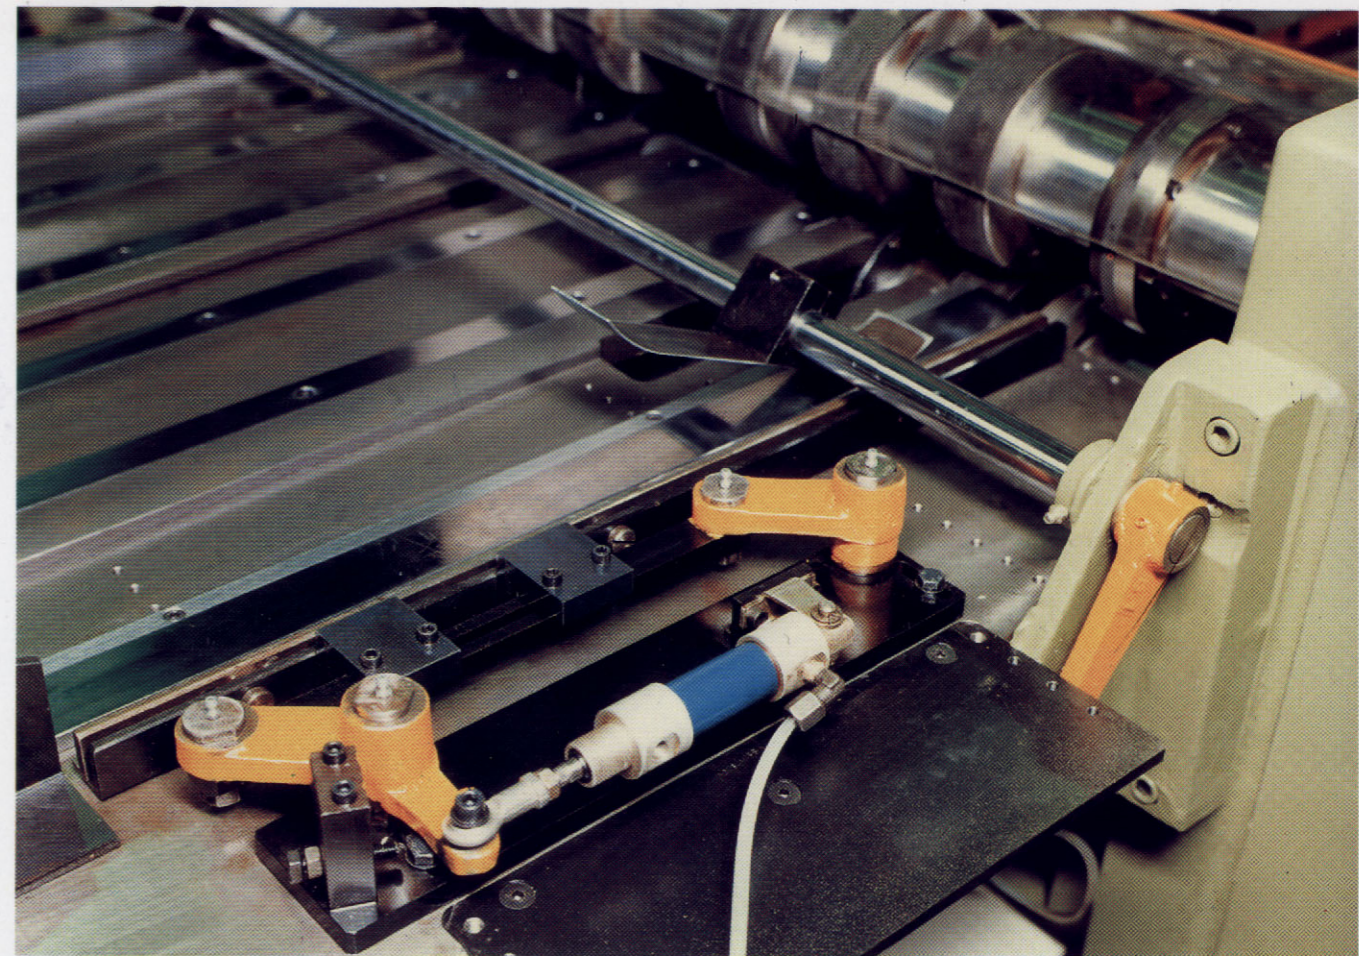

CESOIA A TAGLIO SFALSO Mod. A183

Massimo utilizzo del foglio con minimo rifilo geometrico. Struttura a ponte per la guida della slitta. Tavola di alimentazione completa di due barre di trasporto. Gruppo per il rifilo laterale. Albero principale recante il volano e di due eccentrici per la slitta. Spintori ausiliari azionati da un pistone pneumatico controllato da un microinterruttore per una corretta fasatura. Gruppo freno/frizione elettropneumatico. Lubrificazione centralizzata. Controlli centralizzati.

